


# JAMB DETAIL CONSTRUCTION

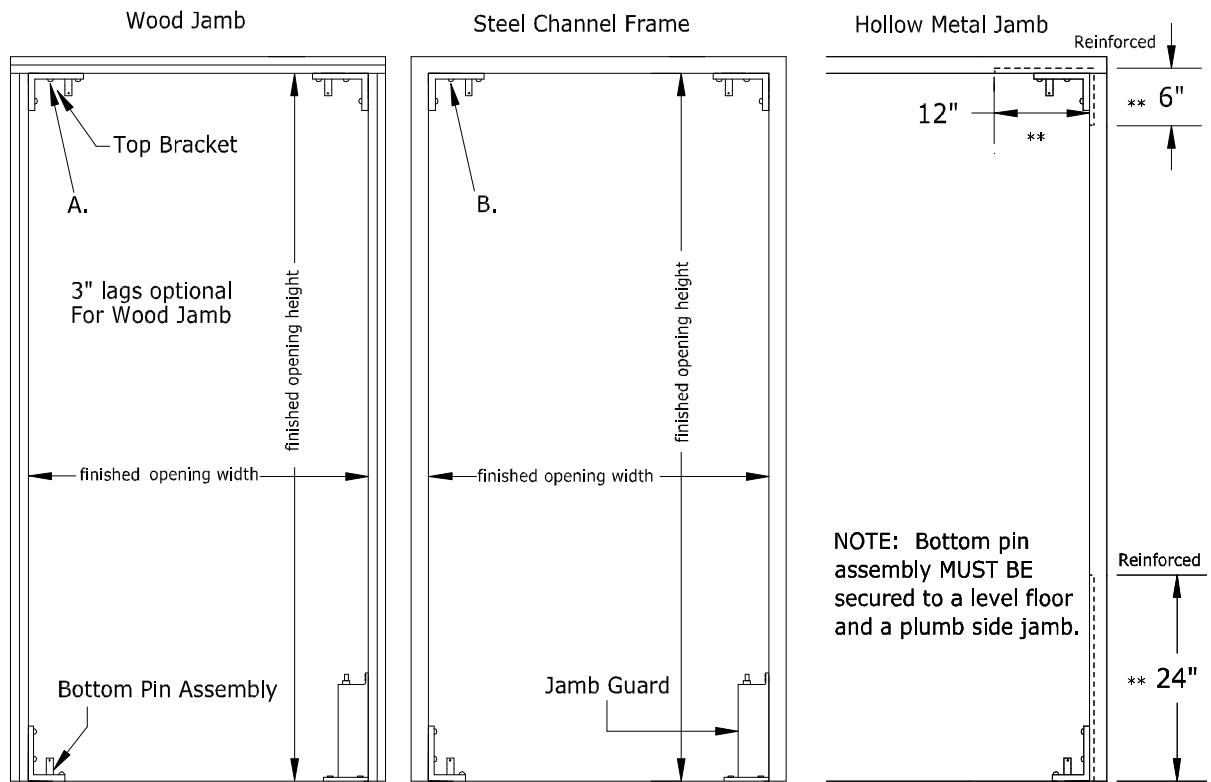

A. 1-1/2" sheet metal screws supplied for mounting top and bottom brackets to jambs.

B. 5/16" x 3/4" machine screws supplied or 5/16" x 1" self tapping screws available for mounting top and bottom brackets to jamb.

\*\* Reinforced Hollow Metal Jamb

NOTE: Jamb guard MUST BE secured to a level floor and a plumb side jamb.

ELIASON CORPORATION *Easy Swing*® Impact Doors

website: [www.eliasoncorp.com](http://www.eliasoncorp.com)

P.O. Box 2128, Kalamazoo, MI 49003

Phone: 800-828-3655 / 269-327-7003

Fax: 800-828-3577 / 269-327-7006

email: [doors@eliasoncorp.com](mailto:doors@eliasoncorp.com)

P.O. Box 1026, Woodland, CA 95776

Phone: 800-828-2655 / 530-662-5494

Fax: 800-662-5192 / 530-662-5192

email: [doors@eliasonwest.com](mailto:doors@eliasonwest.com)